


CORDED COMPOSITE, POLYESTER STRAPPING

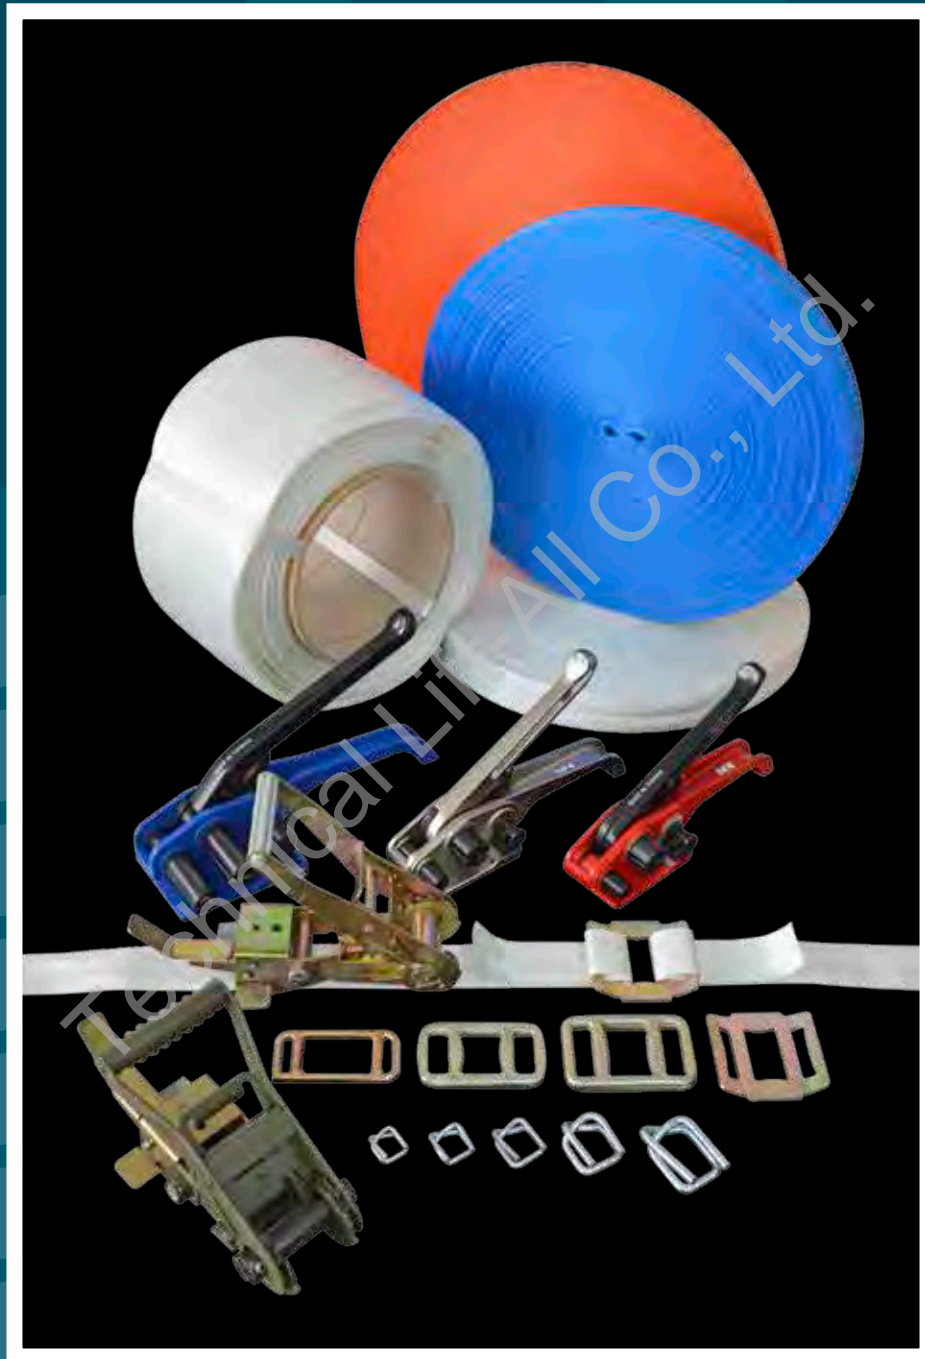

ONE-WAY LASHING SYSTEM

Catalog No. C1-2016 Europe.10

CORDED COMPOSITE STRAPPING

Corded composite strapping is packaging strap for replaces steel strapping for all applications with special features which give it a competitive edge over conventional steel straps. The corded composite strap is made from 100% high tenacity polyester yarn with protected by thermoplastic coating. There is CS strap size 13 mm. - 32 mm. are also mostly used for securing loads inside containers and all multi purpose securing.



Description	Type	Breaking Strength	Width		Package
			mm.	inches	
Composite Strap	CS-13	300 kgs	13 mm.	1/2"	1,000 m./roll
Composite Strap	CS-16	425 kgs	16 mm.	5/8"	850 m./roll
Composite Strap	CS-19	625 kgs	19 mm.	3/4"	600 m./roll
Composite Strap	CS-25	785 kgs	25 mm.	1"	500 m./roll
Composite Strap	CS-32	1,500 kgs	32 mm.	1-1/4"	250 m./roll



Description	Type	Breaking Strength	Width		Package
			mm.	inches	
Wire Buckle Galv.	WB-13	400 kgs	13 mm.	1/2"	1,000 pcs/box
Wire Buckle Galv.	WB-16	500 kgs	16 mm.	5/8"	1,000 pcs/box
Wire Buckle Galv.	WB-19	700 kgs	19 mm.	3/4"	1,000 pcs/box
Wire Buckle Galv.	WB-25	850 kgs	25 mm.	1"	500 pcs/box
Wire Buckle Galv.	WB-32	1,500 kgs	32 mm.	1-1/4"	150 pcs/box



TP-310

Tensioner with oilless bearing in handle and base.
For 3/8"-3/4" Cord strapping



TP-243

Tensioner with oilless bearing in handle and bearing in base.
For 3/8"-3/4" Cord strapping



TP-391

Heavy duty aluminium Tensioner with oilless bearing in handle and base.
For 3/8"-3/4" Cord strapping



TP-472

Heavy duty aluminium Tensioner with oilless bearing in handle and base.
For 3/4"-1-1/2" Cord strapping



TP-482

Heavy duty aluminium tensioner with oilless bearing in handle and base.
For 1"-2" Cord strapping



- ✓ High tenacity polyester yarn with thermoplastic coating protected
- ✓ Strong & Safe
- ✓ Light weight & Easy to use
- ✓ Protect Surface & Finish products
- ✓ Prevent damage
- ✓ Elongation & Shock absorbing
- ✓ Chemical resistant
- ✓ Without Rust, Rot & mildew

ONE-WAY LASHING WEBBING

One-Way Lashing Webbing (Woven Strap) is packaging for all applications with special features for heavy duty used. It to replaces steel strap and ratchet strap that easy to used and design for safe cost. The One-Way Lashing Webbing is made from 100% high tenacity polyester fibre. There is LS strap size 32 mm. - 50 mm. are also mostly used for cross lashing inside containers and all multi purpose securing loads of transportation.



Description	Type	Breaking Strength	Width		Package
			mm.	inches	
Lashing Webbing	LS-32	2,300 kgs	32 mm.	1-1/4"	100 m./roll
Lashing Webbing	LS-38	3,500 kgs	38 mm.	1-1/2"	100 m./roll
Lashing Webbing	LS-41	5,000 kgs	41 mm.	1-5/8"	100 m./roll
Lashing Webbing	LS-50	5,000 kgs	50 mm.	2"	100 m./roll
Lashing Webbing	LS-48	3,000 kgs	48 mm.	2"	100 m./roll



Description	Type	Breaking Strength	Width		Package
			mm.	inches	
One-Way Buckle, Zinc	OWB-32	2,300 kgs	35 mm.	1-3/8"	100 pcs/box
One-Way Buckle, Zinc	OWB-38	4,000 kgs	42 mm.	1-5/8"	100 pcs/box
One-Way Buckle, Zinc	OWB-50	5,000 kgs	55 mm.	2"	50 pcs/box
One-Way Buckle, Zinc	OWB-5025	2,500 kgs	55 mm.	2"	200 pcs/box




OWB5025

One way buckles,
B/S 2,500 kgs.,
Width 50 mm.



WH5050N

No sew hook, B/S 5,000 kgs.,
Width 50 mm.



RB5050NS

Heavy duty ratchet spanner.
For 1-1/2"-2" Webbing



RB5050LHE

Extra Heavy duty Tensioner.
For 1-1/2"-2" Lash Webbing





TP-482

Heavy duty aluminium
tensioner with oilless bearing
in handle and base.
For 1"-2" Cord strapping



- ☑ 100 % High tenacity polyester fibre
- ☑ Heavy duty load up to 5,000 kgs.
- ☑ Strong, Safe cost and time
- ☑ Light weight & Easy to use
- ☑ Protect Surface & Finish products
- ☑ Prevent damage
- ☑ Elongation & Shock absorbing
- ☑ Chemical resistant
- ☑ Without Rust, Rot & mildew
- ☑ Certified standard B.S. 3481



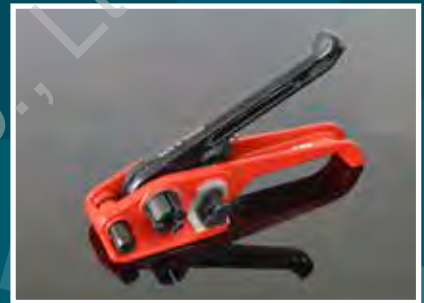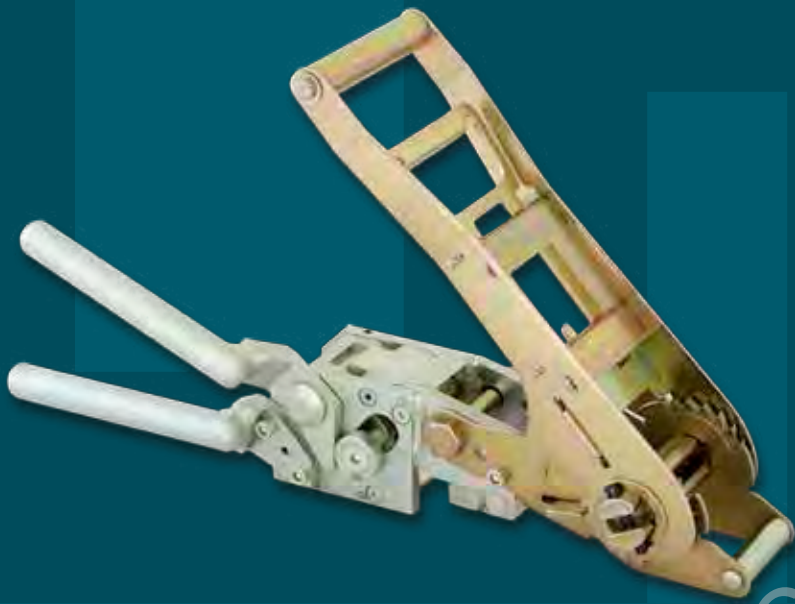

บริษัท บิดดี ซัพพลาย แอนด์ เซอร์วิส จำกัด 10/15 หมู่ 1 ต.โป่ง อ.บางละมุง จ.ชลบุรี 20150
BDD Supply And service Co.,Ltd. 10/15 Moo 1, T.Pong A.Banglamung Chonburi
20150

Tel: 038 227 299
Mobile: 081 949 232 9
Fax: 038 227 172
bundit-pa@hotmail.com
sale@bd-dee.com
www.bd-dee.com

ติดต่อฝ่ายขาย : บัณฑิตย์ พัชรปาล : 081-949 232 9